RNAV (GPS) RWY 33

WASHINGTON RGNL (FYG)

WAAS	APP CRS		
CH **45715**	**333°**	Rwy Idg	**5002**
W33A		TDZE	**486**
		Apt Elev	**488**

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Spirit of St. Louis altimeter setting and increase all DA 42 feet and all MDA 60 feet, increase LNAV/VNAV all Cats visibility ¼ mile and Circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA when using Spirit of St. Louis altimeter setting.

MISSED APPROACH: Climb to 2700 direct EQAXO and hold.

AWOS-3	ST. LOUIS APP CON	UNICOM
121.325	**126.5 254.3**	**122.8** (CTAF) L

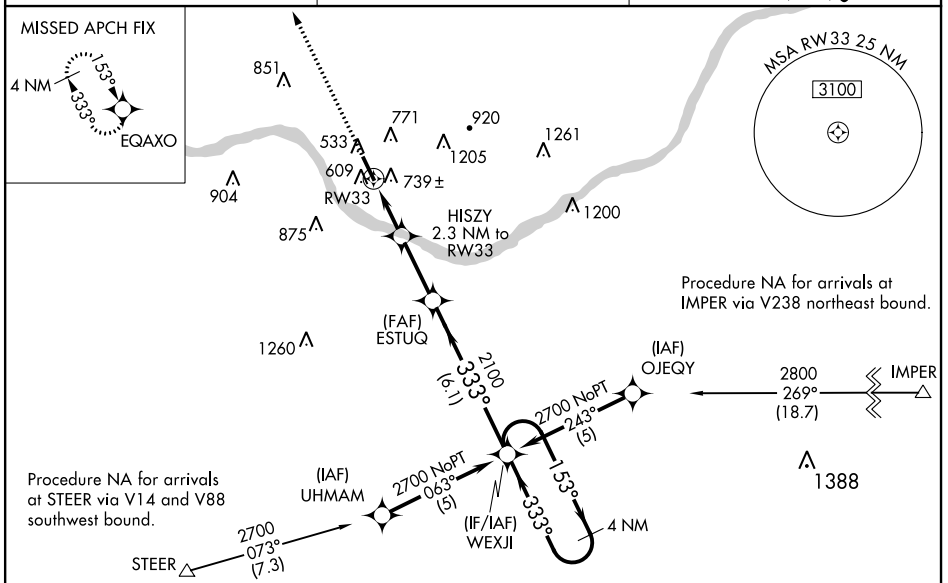

NC-3, 11 OCT 2018 to 08 NOV 2018

NC-3, 11 OCT 2018 to 08 NOV 2018

ELEV 488 | TDZE 486

MIRL Rwy 15-33 L

REIL Rwys 15 and 33 L

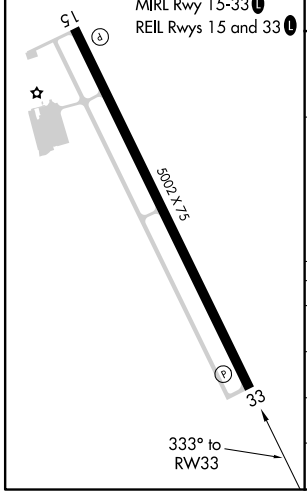

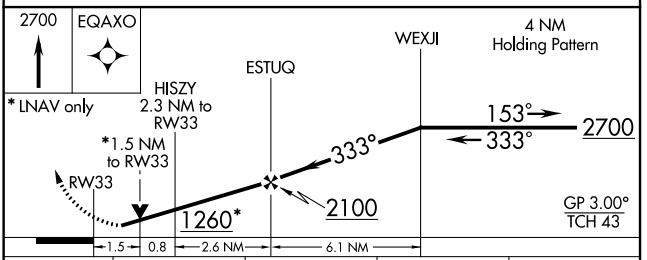

CATEGORY	A	B	C	D
LPV DA	824-1¼ 338 (400-1¼)			NA
LNAV/VNAV DA	1051-2 565 (600-2)			NA
LNAV MDA	1000-1 514 (600-1)		1000-1½ 514 (600-1½)	NA
CIRCLING	1220-1 732 (800-1)	1260-1¼ 772 (800-1¼)	1260-2¼ 772 (800-2¼)	NA